


s.35 NPT high pressure

Mini 1/8"-1/2"

drawn brass ball valves

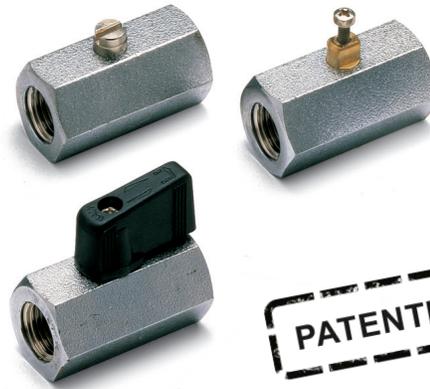

PATENTED



Quality:

- Dual sealing system allows valve to be operated in either direction making installation easier
- No metal-to-metal moving parts
- No maintenance ever required
- Silicone-free lubricant on all seals
- Chrome plated brass ball for longer life
- Each valve is seal tested for maximum safety
- Handle/stem clearly shows ball position

Body:

- One piece drawn sand blasted brass body with extremely compact design
- Finest brass according to EN 12164 specification
- Patent n. 7011-B/89

Stem:

- Blowout-proof brass stem with FPM O-ring

Seals:

- Pure PTFE self-lubricating seats with flexible-lip design



Threads:

- NPT taper ANSI B. 1.20.1 Female by Female threads

Handle:

- Reinforced nylon black wedge handle removable with valve in service

Working Pressure:

- 450 PSI
- non-shock cold working pressure

Working Temperature:

- -4°F / +200°F
- +250°F screw driver version and metal wedge handle
- Warning: freezing of the fluid in the installation may severely damage the valve

Options:

- Male by Female threads
- Screw driver or wrench operated
- Nylon wedge handle yellow, red or green
- Metal wedge handle available in colours red, black, yellow, green, light blue, chrome plated
- Grey wedge handle in Grivory® - high performing polymer
- ISO 228 parallel threads
- Additional connection options on demand


Upon Request:

- Aluminum body
- ISO 7/1 BSPT Taper threads
- Dezincification Resistant brass CW602N


Approved by or in compliance with:

- GOST-R (Russia)
- Hygiene and epidemic center in Moscow city (Russia)
- UkrSepro (Ukraine)
- RoHS Compliant
- EAC - Declaration of conformity (Russia-Kazakhstan-Belarus)

NOTE: Approvals apply to specific configurations/sizes only.

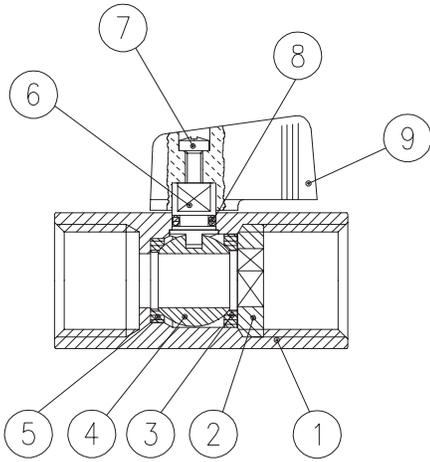

Part Description	Q.ty	Material
1	1	CW617N
2	1	CW617N
3	1	PTFE
4	1	CW617N
5	1	PTFE
6	1	CW617N
7	1	CB4FF
8	1	FPM
9	1	Nylon glass filled 30%

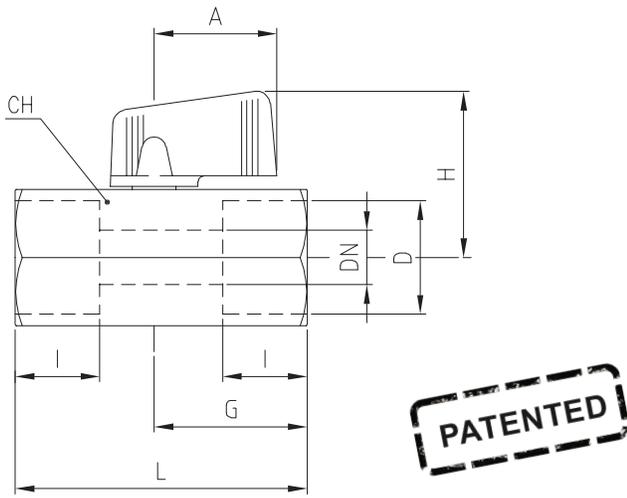


Code	S35AX0	S35BX0	S35CX0	S35DX0
D (inch)	1/8	1/4	3/8	1/2
DN(inch)	0.236	0.314	0.314	0.393
I (inch)	0.354	0.472	0.472	0.610
L (inch)	1.712	1.712	1.712	2.106
G (inch)	0.905	0.905	0.905	1.102
A (inch)	0.885	0.885	0.885	0.885
H (inch)	1.220	1.220	1.220	1.299
CH(inch)	0.826	0.826	0.826	0.984


DN shows the nominal flow diameter.

Ask for additional information on the whole range of **RuB** valves and consult with your supplier for special applications.

Pressure-Temperature Chart

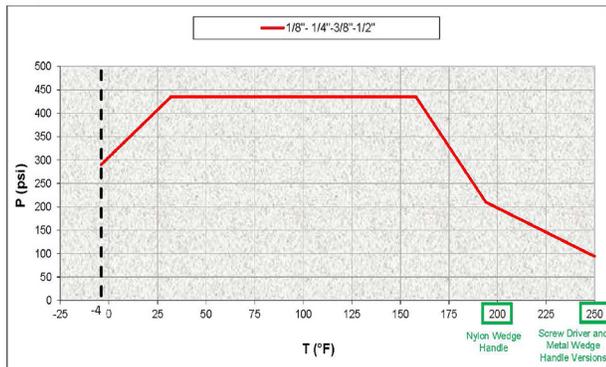

Pressure Drop Chart

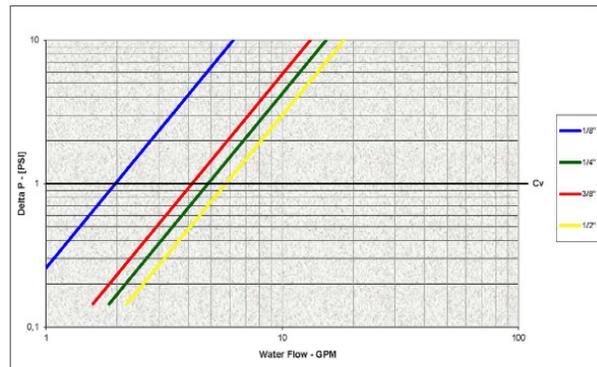

The company reserves all rights for the information contained herein. Products may be changed at any time without notice. Any undated reference to a code or standard shall be interpreted as referring to the latest edition. **RuB** and logo are registered trademarks of **RuB**-Rubinetteria utensilerie Bonomi. Other logos and registered trademarks are property of respective owners.

XCES35N - Rev: 3580